

# 4K解像度対応 高精細、高性能モデル

98V 86V 75V 65V 55V 49V

ULTRA HD IPS 24Hz 7ms SUPER SIGNATURE webOS


主な製品スペック

	98V	86V	75V	65V	55V	49V
輝度(標準値)	500cd/m <sup>2</sup>					
解像度	3840×2160					
応答速度	8ms		6ms		8ms	
視野角	178° / 178° (CR≥10)					
表示色	約10.7億色					




外形寸法 / 重量 / 端子図


**98V** 外形寸法:W2191.8×H1266.8×D99.4\*(mm)  
重量:88.0kg  
VESA:800×400

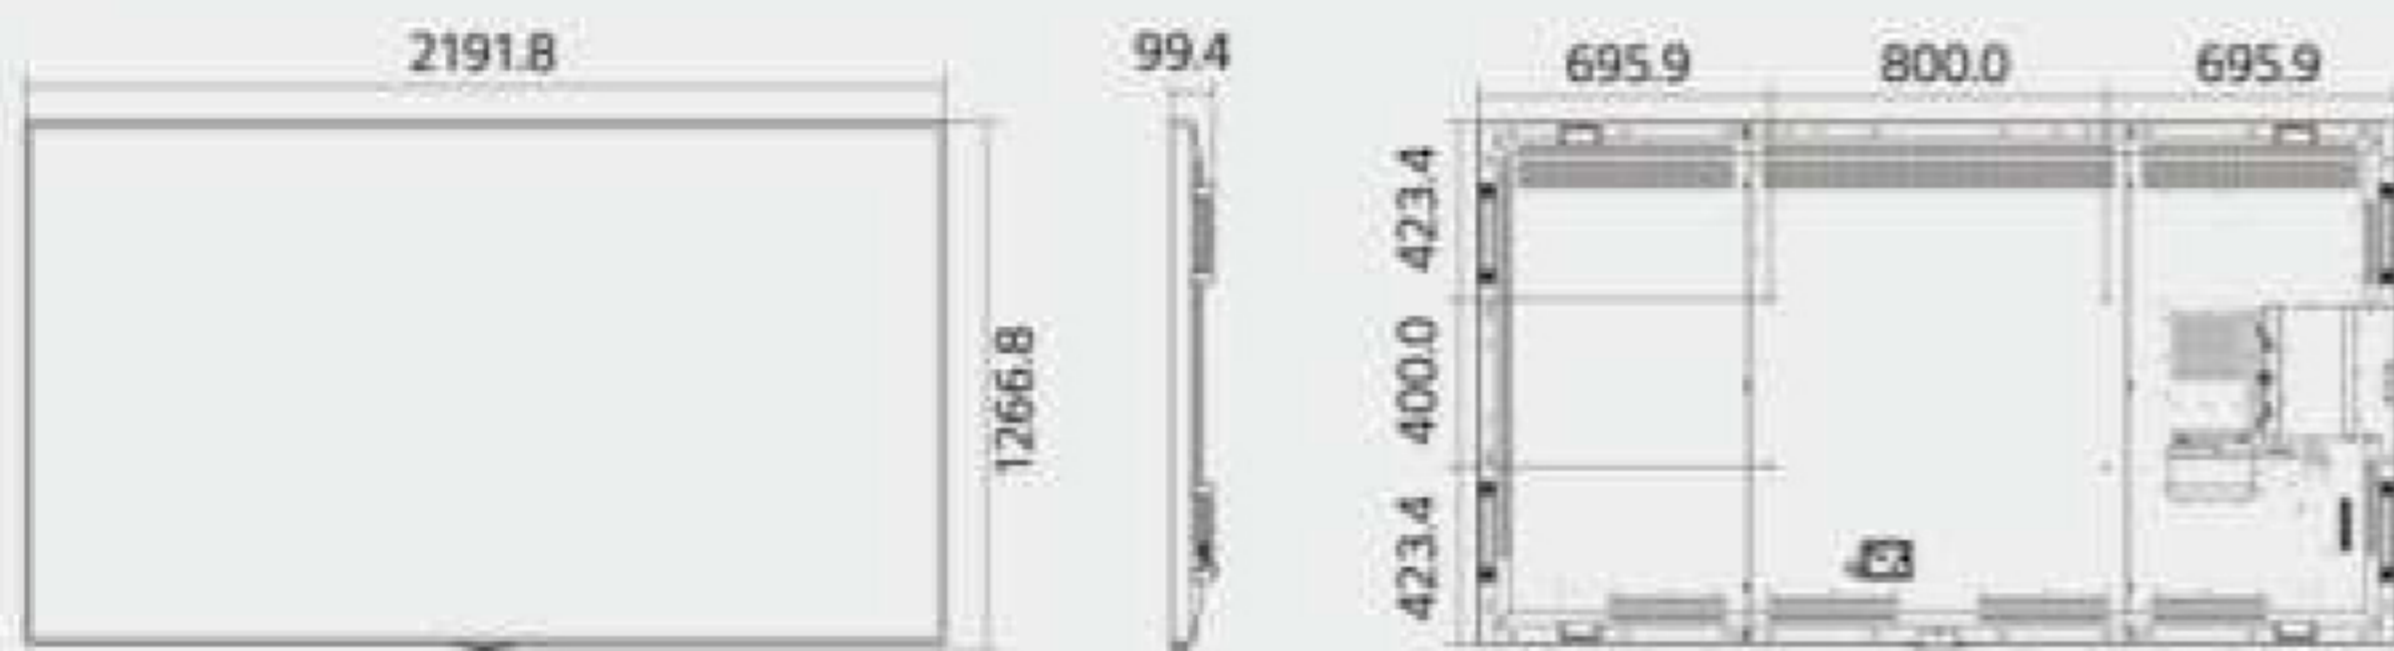


**86V** 外形寸法:W1926.2×H1101.2×D78.0\*(mm)  
重量:49.0kg  
VESA:600×400

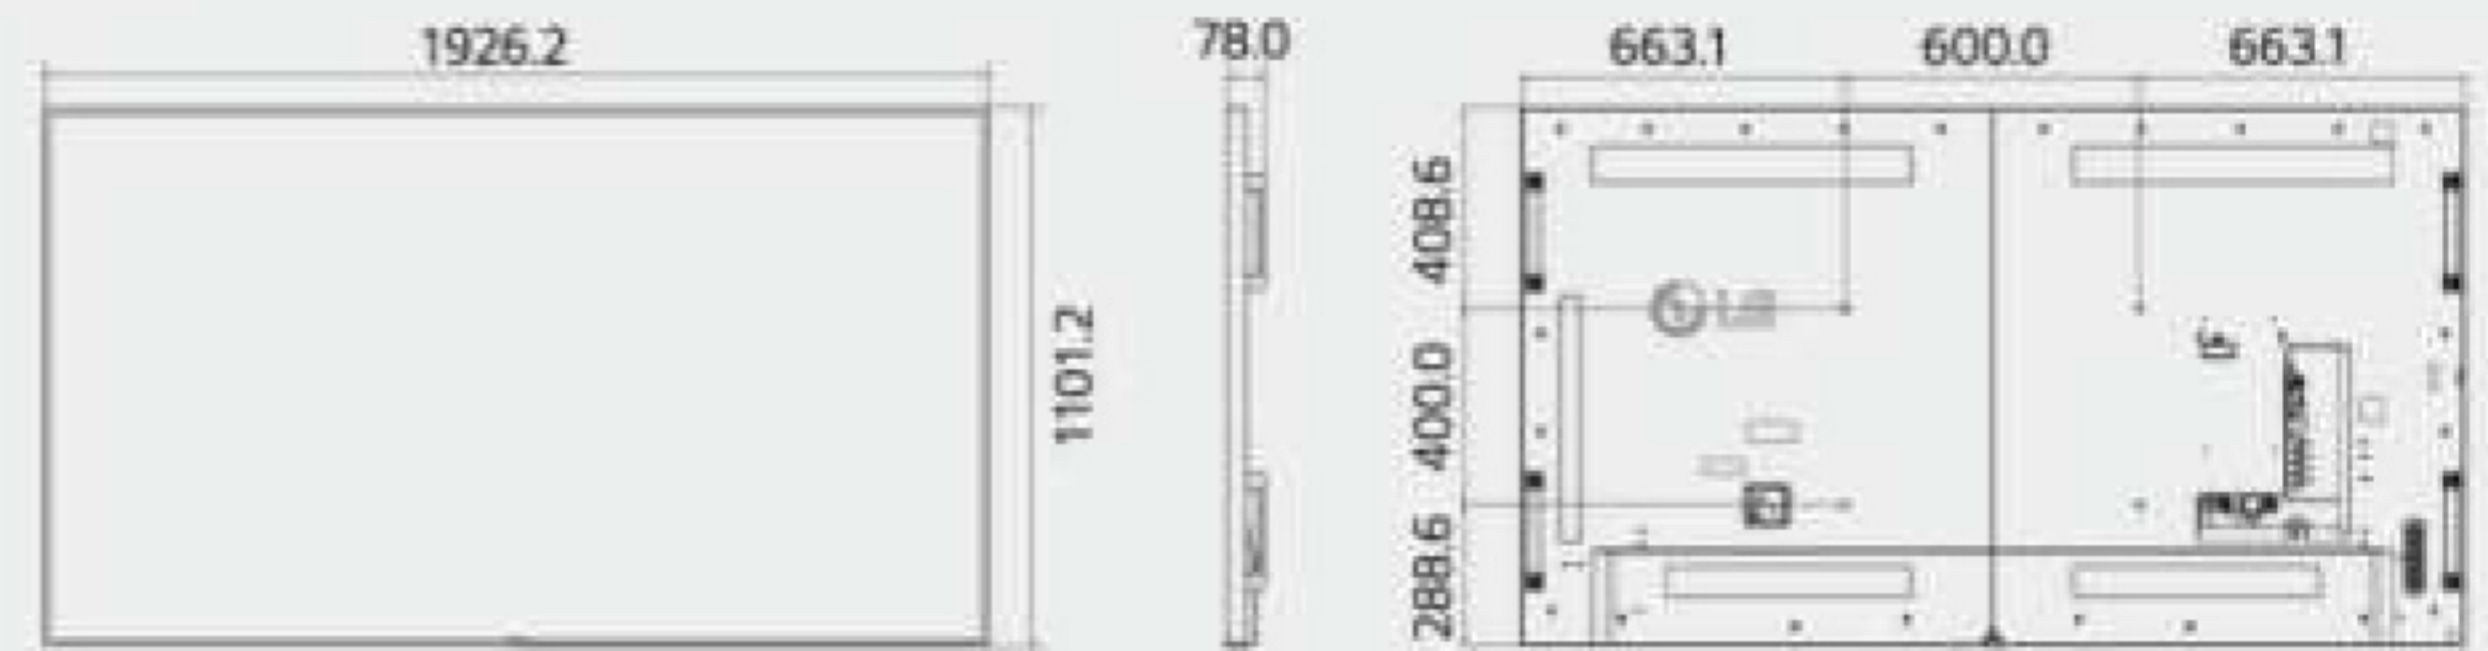


**75V** 外形寸法:W1682.4×H963.3×D73.9\*(mm)  
重量:41.5kg  
VESA:600×400

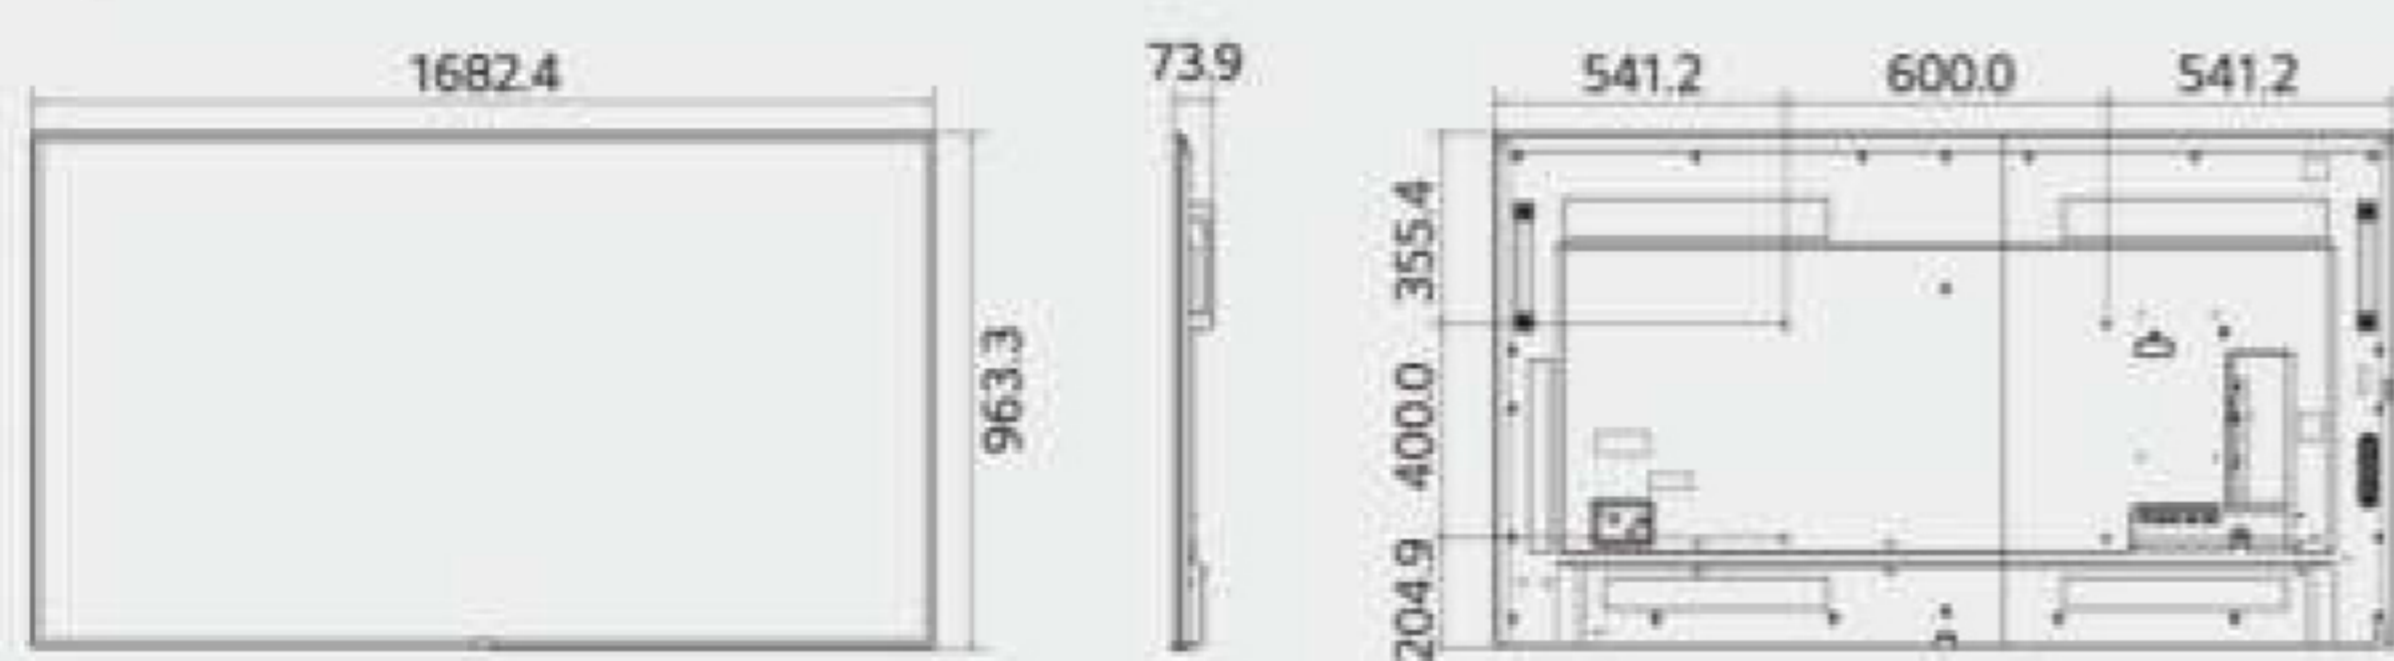


**65V** 外形寸法:W1458.6×H848.9×D40.1\*(mm)  
重量:26.0kg  
VESA:300×300

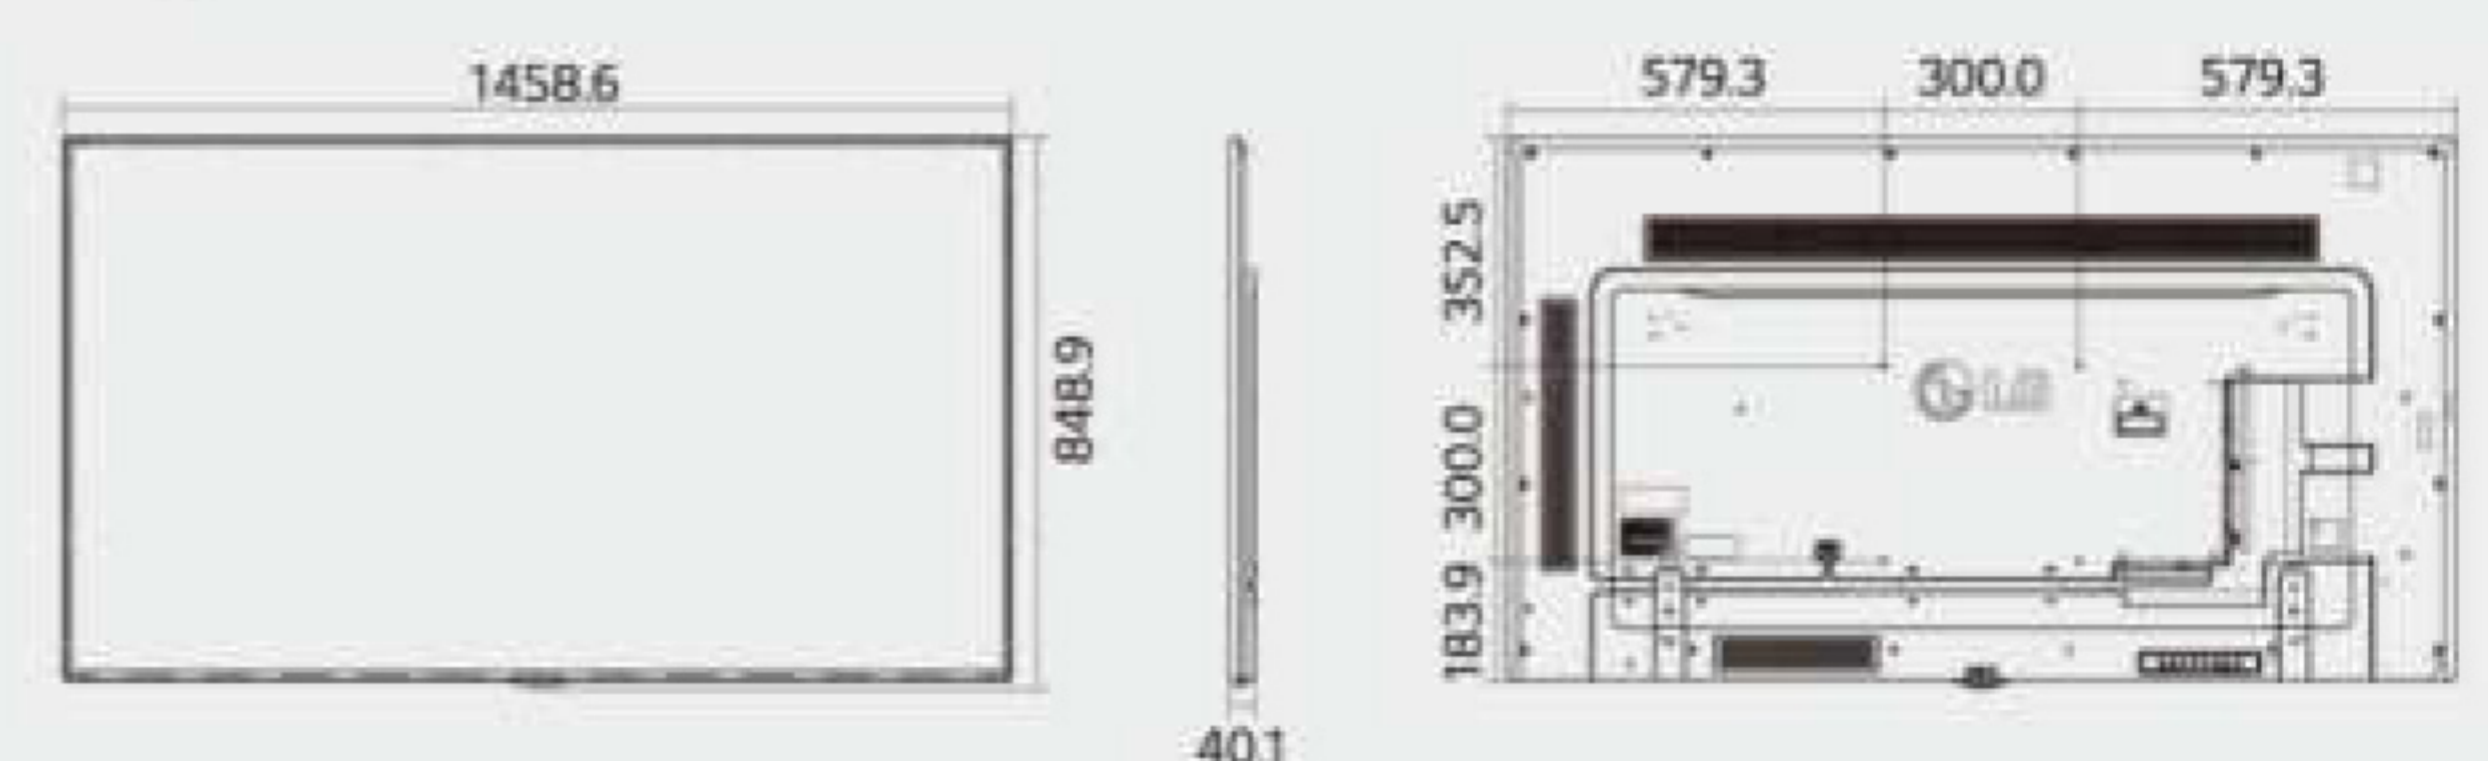


**55V** 外形寸法:W1239.8×H725.2×D38.6(mm)  
重量:16.6kg  
VESA:300×300

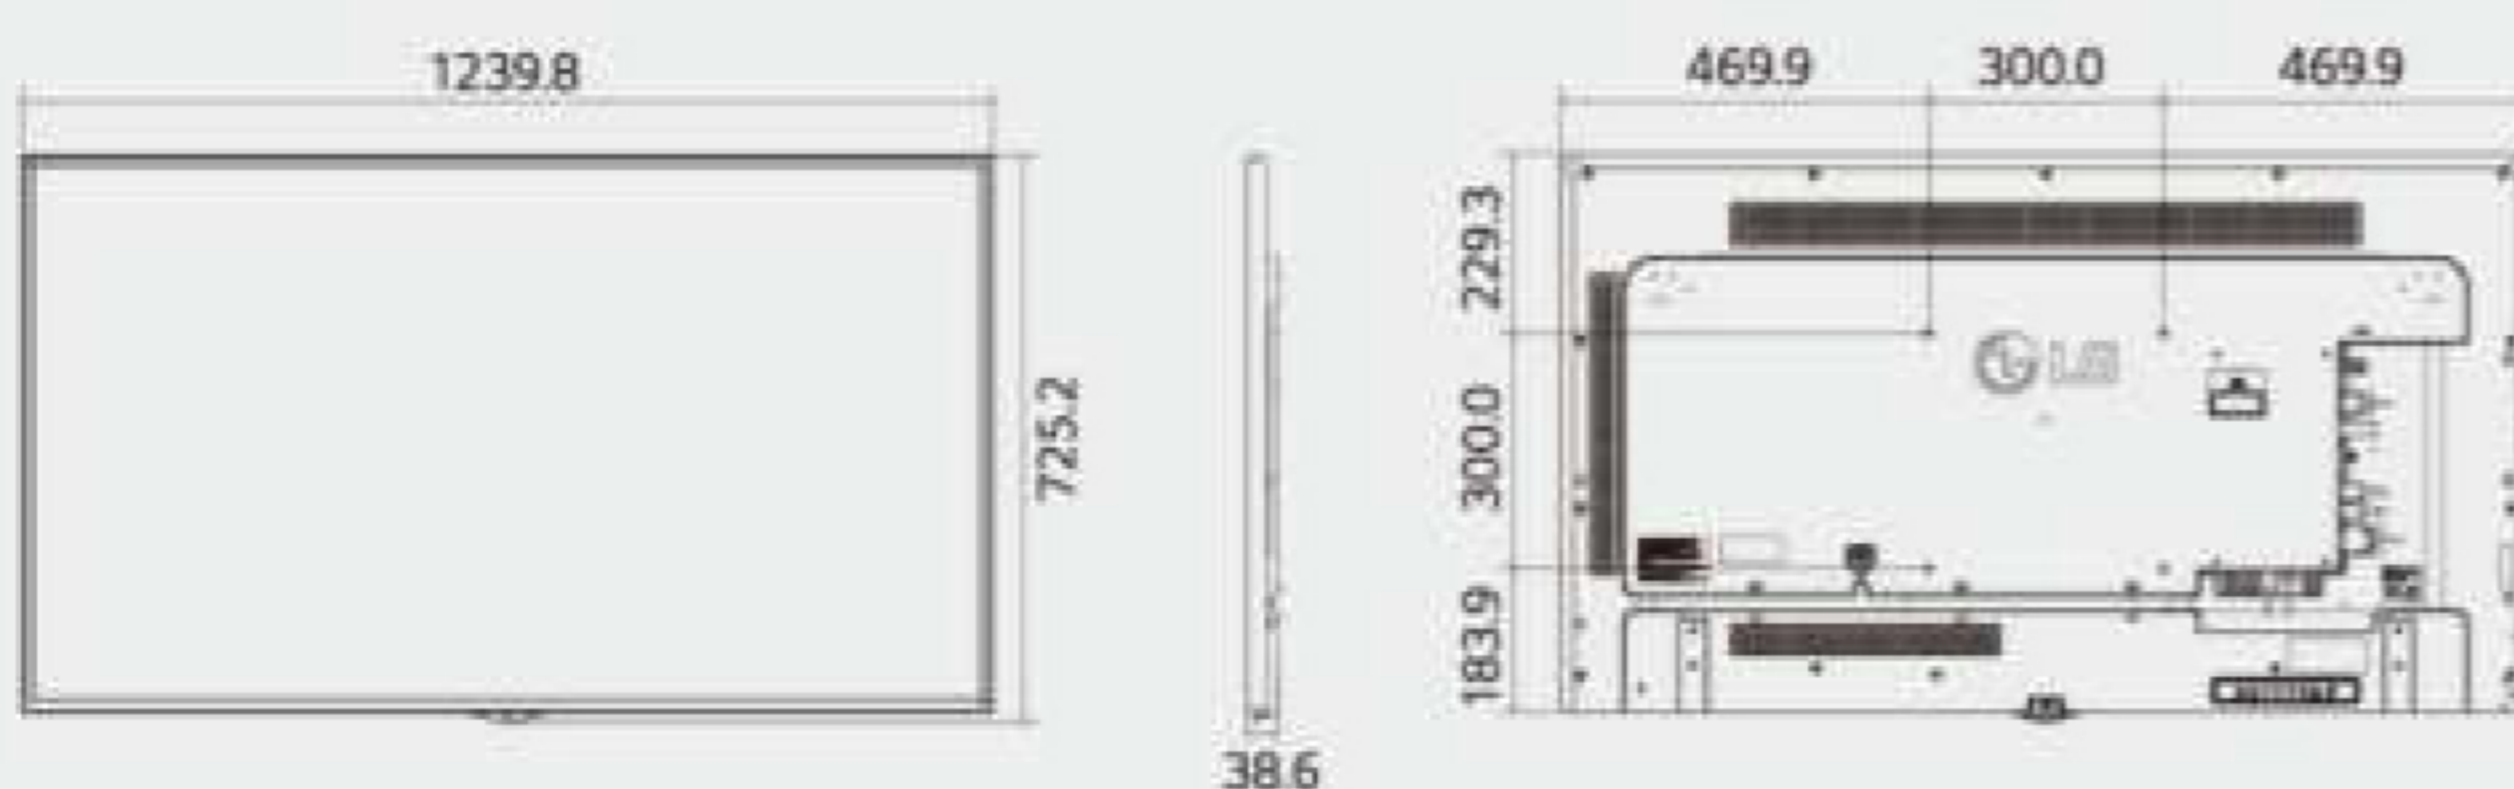

**49V** 外形寸法:W1103.2×H648.0×D38.6(mm)  
重量:13.3kg  
VESA:300×300

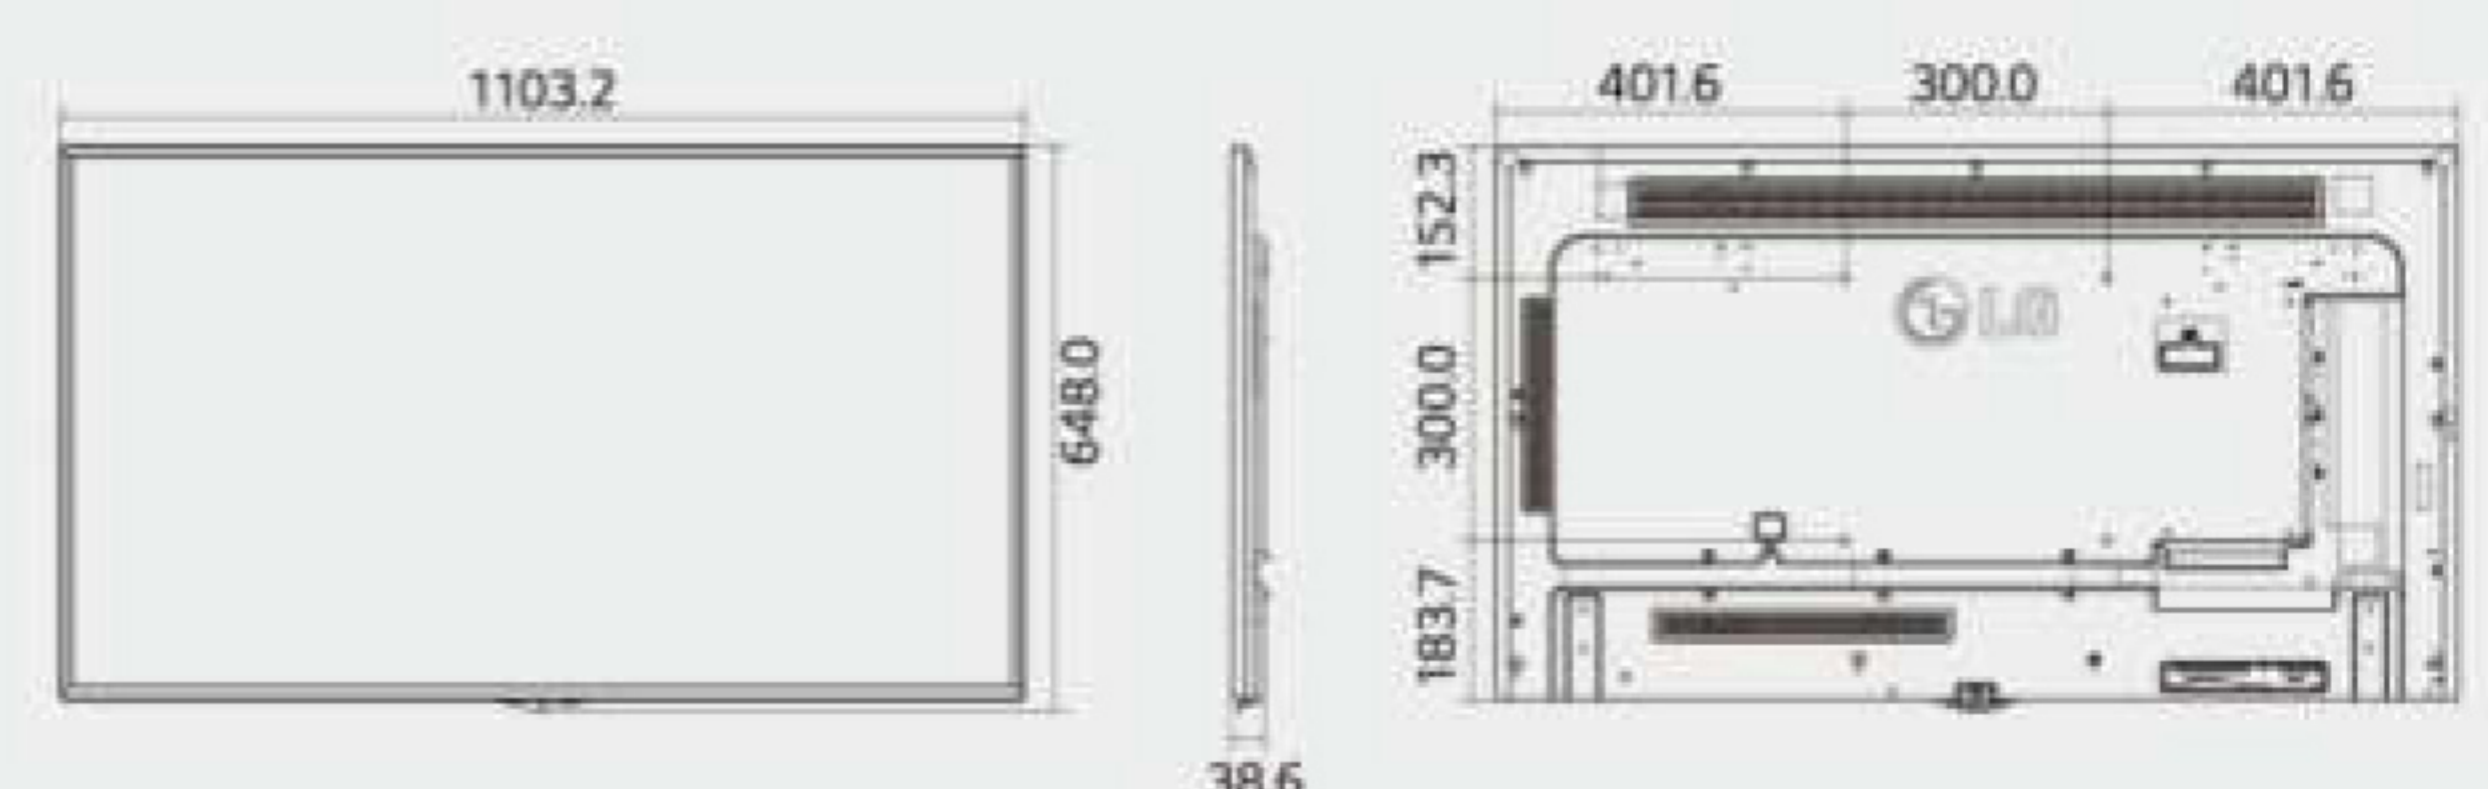


98V

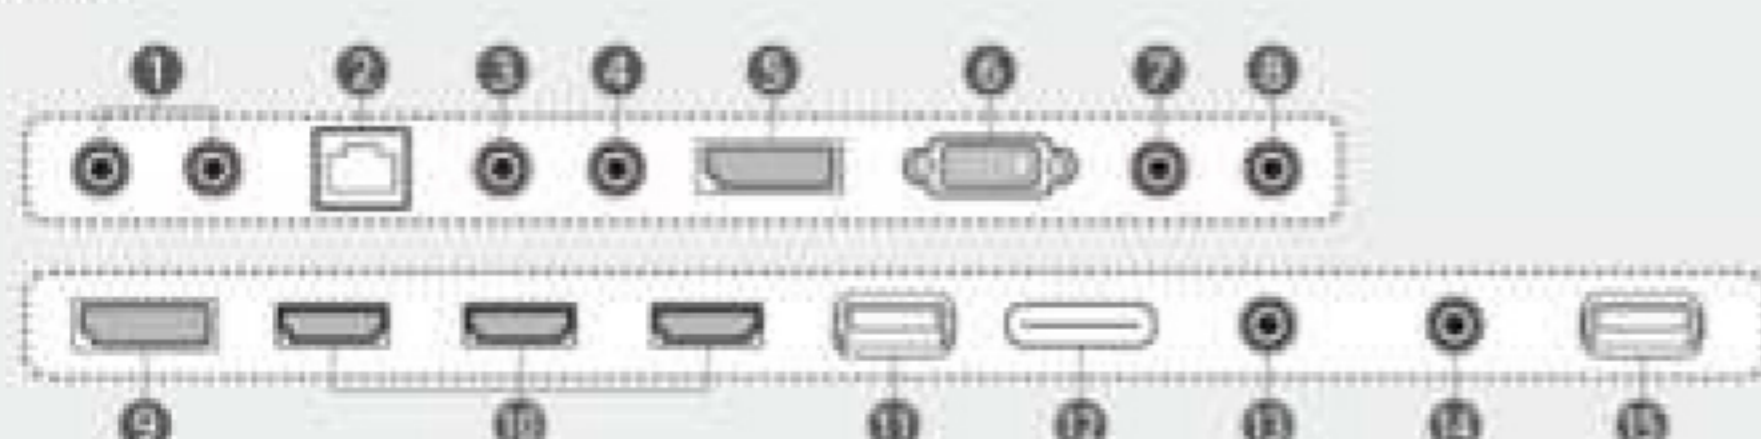


- ① Speaker Out    ⑤ DisplayPort Out    ⑨ DisplayPort In    ⑬ RS-232C In
- ② LAN    ⑥ DVI-D In    ⑩ HDMI IN    ⑭ RS-232C Out
- ③ Audio In    ⑦ Pixel Sensor    ⑪ USB 3.0    ⑮ USB 3.0
- ④ Audio Out    ⑧ IR Sensor    ⑫ SD Card

86V / 75V

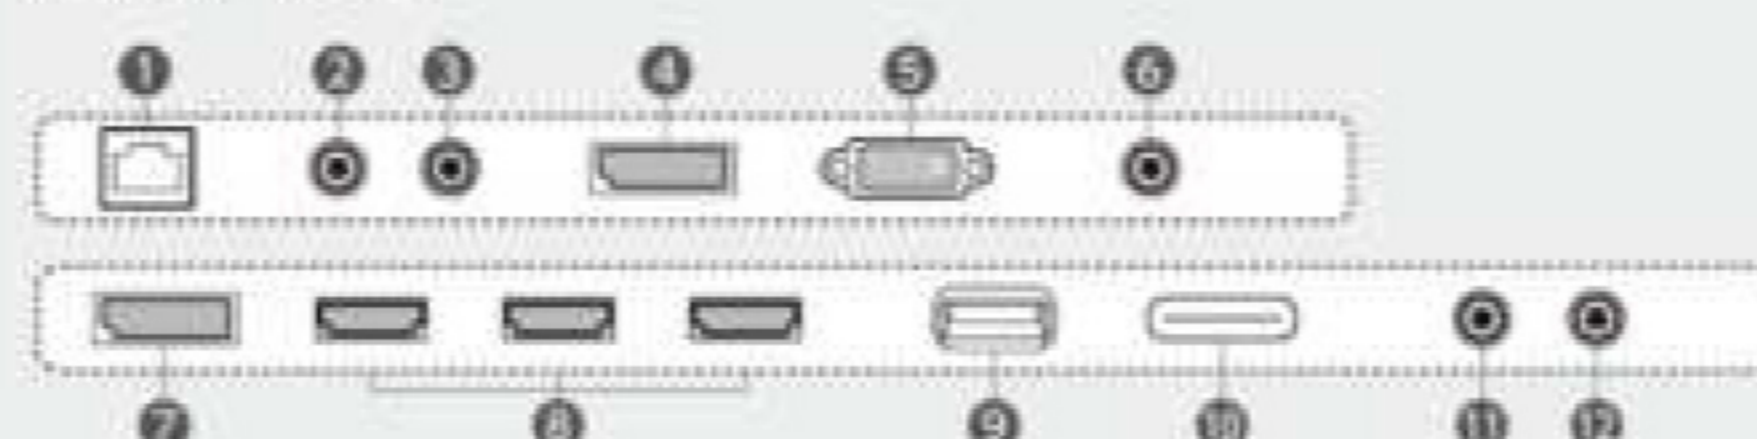

- ① LAN    ⑤ DVI-D In    ⑨ USB 3.0
- ② Audio In    ⑥ IR Sensor    ⑩ SD Card
- ③ Audio Out    ⑦ DisplayPort In    ⑪ RS-232C In
- ④ DisplayPort Out    ⑧ HDMI In    ⑫ RS-232C Out

65V / 55V / 49V

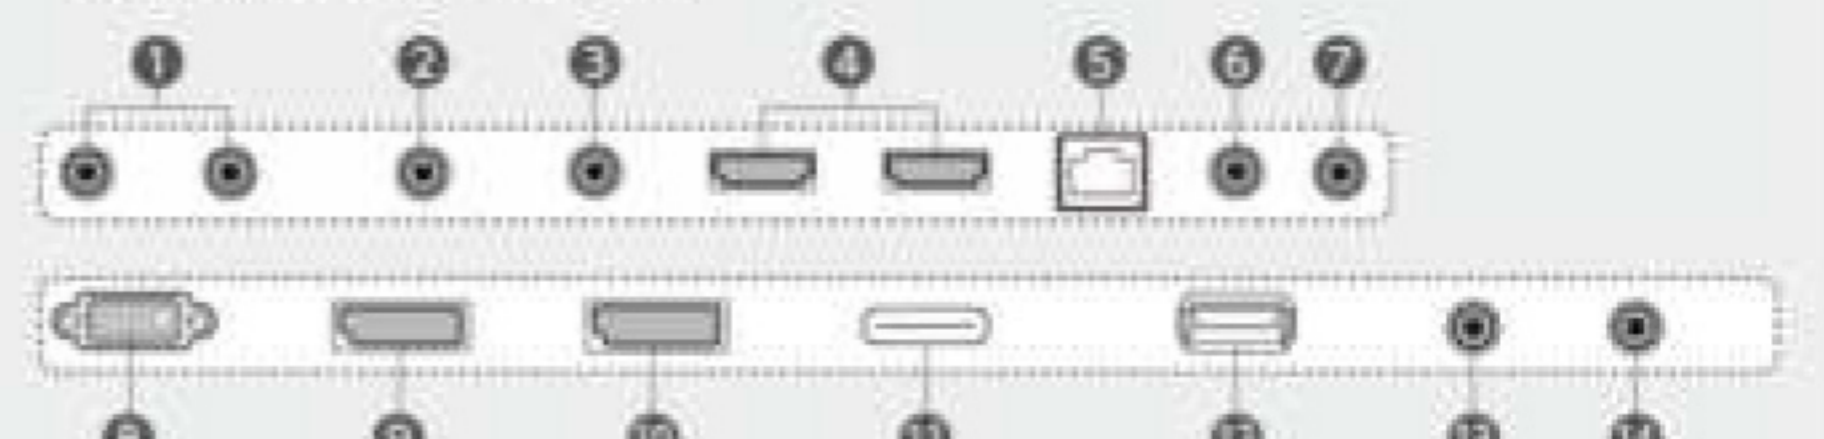

- ① Speaker Out    ⑤ LAN    ⑨ DisplayPort In    ⑬ RS-232C In
- ② IR Sensor    ⑥ Audio In    ⑩ DisplayPort Out    ⑭ RS-232C Out
- ③ Pixel Sensor    ⑦ Audio Out    ⑪ SD Card
- ④ HDMI In    ⑧ DVI-D In    ⑫ USB 3.0

\*ハンドル込みの厚さ