

2 in 1 Analog/Digital Professional Metallic LCD Monitor

CH-L191AV-1HVE

HVE Series


Features:

- NTSC/PAL Auto Switch
- 3D De-interlace Technology
- 3D Comb Filter Technology
- Advanced Color Engine
- Supported 1080p Full HD
- Build-in 2W+2W speaker
- VESA standard bracket
- Wall mountable capability
- Plastic Frame with metal back case




Options:

- Metal Frame
- Stand style
- Panel protection Glass
- Housing color/logo print
- Rack mount
- Touch function

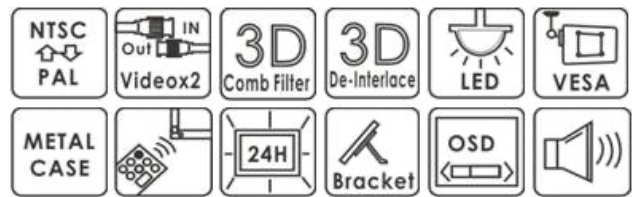

Connectors:

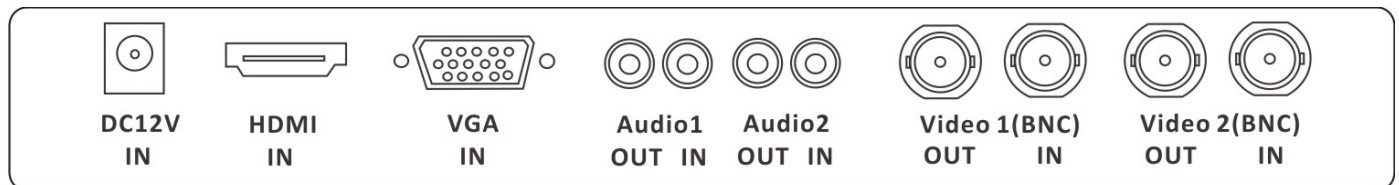

Specification:

Model	CH-L191AV-1HVE
TFT LCD panel	19"
Active area (mm)	376.32x301.056
Picture format	5:4
Max. resolution	1280x1024
Pixel pitch (mm)	0.294x0.294
Colors	16.7M
Brightness	250 cd/m ² [LED]
Contrast	1000:1
Response time(Tr/Tf)	3.6/1.4ms
View angle (U/D/L/R)	80/80/85/85
HDMI input	1x (A Type)
PC VGA input	1x VGA input (D-Sub 15 pin) Analog RGB(0.7/1.0Vp-p 75Ω) Separate Sync, Sync On Green Frequency Fh:30~82Khz Fv:50~75Hz
Video input/output	2x / 2x Composite (BNC) auto termination 75Ω

Audio input/output	2x / 2x (3.5ψ phone jack)
Speaker	2x built-in speaker (2 watt)
3D Comb Filter	Yes
3D De-Interlace	Yes
OSD setting	Yes
Key Lock Function	Yes
Power input	AC 100-240V 50/60Hz, Adapter DC 12V/5A
Power consumption	Approx. 22 watt
Dimensions (W*H*D)	430 x 356 x 66.7mm
Weight	5.5 kg
Certification	CE/FCC/RoHS
Operating temperature	0° to 50° C

Subject to technical changes without prior notice. Error excepted.

製品のお見積り・お問い合わせ

株式会社プラズモニクジャパン

✉ info@plazmonic.jp

☎ 045(663)1402